

FULLY SEALABLE ROCKET lenses for XR /-E




01.1011. By 2007 All rights reserved



- Use with all Cree series of white and monochrome XR LEDs Lens
- material optical grade PMMA with high UV and temperature resistance (105°C/220°F)
- High optical efficiency, up to 90%
- No lens holder. Fastening to heat sink with a PU foam adhesive tape of automotive grade
- Lens foot can be potted with resin without losses in optical efficiency (**fully sealed construction** of luminaire possible)
- Diameter 26 mm (approximately 1")
- Easy build of a complete luminaire using ROCKET, XLamp® 7090 XR and heat sink

COMING SOON

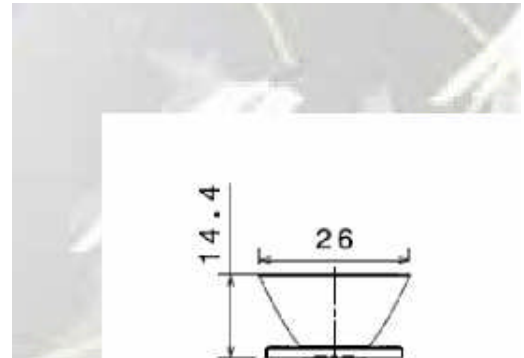

LENS TYPES

NAME	ORDERING CODE	FWHM Angle, Thinfilm & ThinGaN
ROCKET smooth spot	ROCKET-S	±4°
ROCKET oval	ROCKET-O	±3° x ±20°
ROCKET wide	ROCKET-W	±30°