

# LLS-X-FLD6-17/25/30-CC-[Mount]

17 / 25 / 30 Watt Adjustable LED Flood Light

Project Name \_\_\_\_\_



## DETAILS

Yoke or 1/2 inch knuckle mount low wattage flood lights are ideal for lighting up spaces from a 10 to 15 foot mounting height. Wattage and color adjustable to fine tune the light to your application.



Color Adjustable



Wattage Adjustable



Photocell

## OVERVIEW

**SKU** LLS-X-FLD6-17/25/30-CC-[Mount]

**Wattage** 17 | 25 | 30

**Lumens** 2890 | 4250 | 5100

**Lumens Per Watt (Efficacy)** 153

**Color Temperature** 3000K | 4000K | 5000K

**Voltage** 100V-277V


## PRODUCT DIMENSIONS

**Product Dimensions** 10.8 in x 8.0 in x 2.5 inch in

**Product Weight** 2.5 lbs

## PRODUCT SKU VARIATIONS

SKU	Mounting
LLS-X-FLD6-17/25/30-CC-KM	Knuckle
LLS-X-FLD6-17/25/30-CC-YM	Yoke

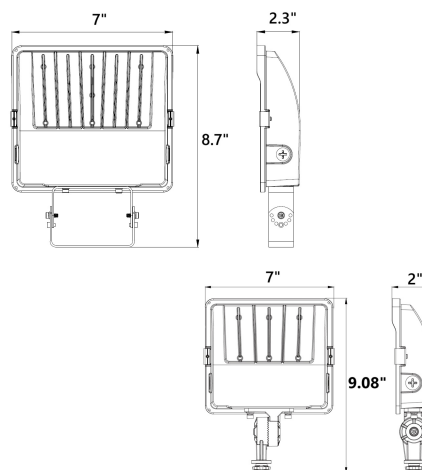

Product design upgrades may result in specification changes without notice. Speak to a Product Specialist for the latest information.

[www.ledlightingsupply.com](http://www.ledlightingsupply.com) (888) 423-3191

Headquartered at: 1 Chestnut Street, 4M Nashua NH 03060

WebID: 2278

# LLS-X-FLD6-17/25/30-CC-[Mount]

17 / 25 / 30 Watt Adjustable LED Flood Light

Project Name \_\_\_\_\_



## PRODUCT SPECIFICATIONS

	<b>Wattage</b>	17   25   30
	<b>Lumens</b>	2890   4250   5100
	<b>Color Temperature</b>	3000K   4000K   5000K
	<b>CRI</b>	80+
	<b>Beam Angles</b>	120°
	<b>Replaces</b>	150 Watt Metal Halide
	<b>Voltage</b>	100-277
	<b>Power Factor (PF)</b>	.9
	<b>THD</b>	15%
	<b>Dimming</b>	No
	<b>Power Factor (PF)</b>	50-60Hz
	<b>Housing</b>	Die-Cast Aluminium
	<b>IP Rating</b>	IP65
	<b>Operating Temperature</b>	-40°F to +113°F
	<b>Rated Life</b>	50,000 (L70) hours
	<b>Certifications</b>	Rebate Eligible   UL Listed   ROHS
	<b>Warranty</b>	5
	<b>Mount</b>	Yoke   Knuckle
	<b>Color Options</b>	Bronze



Product design upgrades may result in specification changes without notice. Speak to a Product Specialist for the latest information.

[www.ledlightingsupply.com](http://www.ledlightingsupply.com) (888) 423-3191

Headquartered at: 1 Chestnut Street, 4M Nashua NH 03060

WebID: 2278

# LLS-X-FLD6-17/25/30-CC-[Mount]

17 / 25 / 30 Watt Adjustable LED Flood Light

Project Name \_\_\_\_\_



## ⚡ ENERGY SAVINGS

Based on 12 hours / day and \$0.13 kWh - eia.gov national average(2025)

Metal Halide Wattage	LED Wattage	1 Year Energy Savings	5 Year Energy Savings
150	17	\$75.38	\$376.92
150	25	\$70.85	\$354.25
150	30	\$68.02	\$340.08

## 🔍 PRODUCT FAMILY MODELS

SKU	Wattage	Lumens	Lumens/Watt
MLLG-WD-LED-BARN-45-50	45	6300	140
MLLG-AG-LED-IMF-600-5-[Optic]-TR-[V]	600	84000	140

## ☀️ AMP DRAW

Wattage	Current Amp Draw			
	120V	240V	277V	480V
17	0.14	0.07	0.06	0.04
25	0.21	0.10	0.09	0.05
30	0.25	0.13	0.11	0.06



Product design upgrades may result in specification changes without notice. Speak to a Product Specialist for the latest information.

🌐 [www.ledlightingsupply.com](http://www.ledlightingsupply.com) ☎️ (888) 423-3191

Headquartered at: 1 Chestnut Street, 4M Nashua NH 03060

WebID: 2278