



Commercial Lighting



Industrial Lighting



Sports Lighting

## MLLG-E-LED-EXPLF Explosion Proof Product Family



**Why  
contractors  
choose us**



Free Lighting  
Plans to ensure  
customer  
satisfaction



Dedicated  
Lighting  
Specialist for  
each project




Large  
inventory of  
LED Lights

# Table of Contents

	Page Number
- MLLG-LED-EXPLF2-40-50-C1D2-V2	3
- MLLG-LED-EXPLF4-60-50-C1D2	4
- MLLG-LED-EXPLF4-80-50-C1D2-V2	5

## 40 Watt 2 Foot Low Profile Explosion Proof LED Linear Light | 5600 Lumens

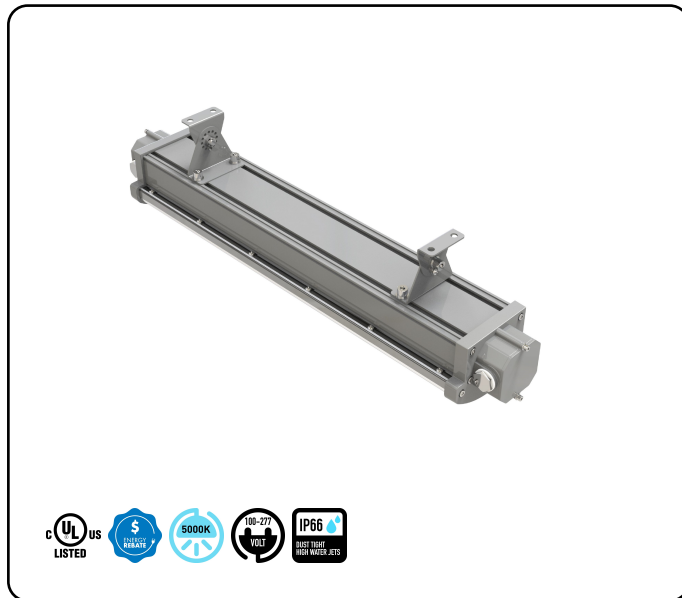

### Product Details

**SKU:** MLLG-LED-EXPLF2-40-50-C1D2-V2

**Web ID:** 2012

**Key Features:** Wattage: 40 - Lumens: 5600 - Lumens Per Watt: 140 - Replaces: 175 Watt Metal Halide - Voltage: 100V-277V - Expl Rating: Class 1 Division 2 or Class 2 Division 2 - Color Temperature: 5000K - CRI: 70 - Dimming: 1-10V - Beam Angles: 120 - Lifespan: 50 000 (L70) hours - Mounting: Bracket or Surface or Wall - Fixture Color: Gray - Frequency: 50-60Hz - Power Factor: .95 - THD: 10%

**Durable Construction:** Housing: Copper Free Aluminum - IP Rating: IP66 - Operating Temperature: -40 F to 131 F - Certifications: UL | Rebate Eligible - Warranty: 5 years

**Features/Accessories:** Explosion Proof C1D2 - Dimming: 1-10V

**Measurements:** Dimensions: 26.4 in x 4.5 in x 6.3 in - Weight: 17 lbs

**Notes:** Class 1 Division 2 Group B C D - Class 2 Division 2 Groups F G - Class 3 - Wet Locations (UL 1598 / UL1598A) - UL844 - CSA - ATEX - IECEX

### Product Specifications

<b>Watts:</b>	40	<b>Beam Angle:</b>	120 deg
<b>Lumens:</b>	5600	<b>Frequency:</b>	50-60Hz
<b>Lumens/Watt:</b>	140	<b>Power Factor:</b>	>.95
<b>Replaces:</b>	175 Watt Metal Halide	<b>THD:</b>	< 10%
<b>Color Temp:</b>	5000K	<b>Housing:</b>	Copper Free Aluminum
<b>CRI:</b>	70+	<b>Fixture Color:</b>	Gray
<b>IP Rating:</b>	IP66	<b>Mount:</b>	Bracket   Surface   Wall
<b>Voltage:</b>	100V-277V	<b>Dimensions:</b>	26.4 in x 4.5 in x 6.3 in
<b>Operating Temp:</b>	-40 degF to 131 degF	<b>Weight:</b>	17 lbs
<b>Rated Life:</b>	50,000 (L70) hours	<b>Warranty:</b>	5 years
<b>Dimmable:</b>	1-10V		

## 60 Watt 4 Foot Low Profile Explosion Proof Linear LED Light | 8400 Lumens



### Product Details

**SKU:** MLLG-LED-EXPLF4-60-50-C1D2

**Web ID:** 2013

**Key Features:** Wattage: 60 - Lumens: 8400 - Lumens Per Watt: 140 - Replaces: 250 Watt Metal Halide - Voltage: 100V-277V - Expl Rating: Class 1 Division 2 or Class 2 Division 2 - Color Temperature: 5000K - CRI: 70 - Dimming: 1-10V - Beam Angles: 120 - Lifespan: 50 000 (L70) hours - Mounting: Bracket or Surface or Wall - Fixture Color: Gray - Frequency: 50-60Hz - Power Factor: .95 - THD: 10%

**Durable Construction:** Housing: Copper Free Aluminum - IP Rating: IP66 - Operating Temperature: -40 F to 131 F - Certifications: UL | Rebate Eligible - Warranty: 5 years

**Features/Accessories:** Explosion Proof C1D2 - Dimming: 1-10V


**Measurements:** Dimensions: 50 in x 4.5 in x 6.3 in - Weight: 30 lbs

**Notes:** Class 1 Division 2 Group B C D - Class 2 Division 2 Groups F G - Class 3 - Wet Locations (UL 1598 / UL1598A) - UL844 - CSA - ATEX - IECEX

### Product Specifications

<b>Watts:</b>	60	<b>Beam Angle:</b>	120 deg
<b>Lumens:</b>	8400	<b>Frequency:</b>	50-60Hz
<b>Lumens/Watt:</b>	140	<b>Power Factor:</b>	>.95
<b>Replaces:</b>	250 Watt Metal Halide	<b>THD:</b>	< 10%
<b>Color Temp:</b>	5000K	<b>Housing:</b>	Copper Free Aluminum
<b>CRI:</b>	70+	<b>Fixture Color:</b>	Gray
<b>IP Rating:</b>	IP66	<b>Mount:</b>	Bracket   Surface   Wall
<b>Voltage:</b>	100V-277V	<b>Dimensions:</b>	50 in x 4.5 in x 6.3 in
<b>Operating Temp:</b>	-40 degF to 131 degF	<b>Weight:</b>	30 lbs
<b>Rated Life:</b>	50,000 (L70) hours	<b>Warranty:</b>	5 years
<b>Dimmable:</b>	1-10V		

**80 Watt 4 Foot Low Profile Explosion Proof Linear LED Light | 11200 Lumens**

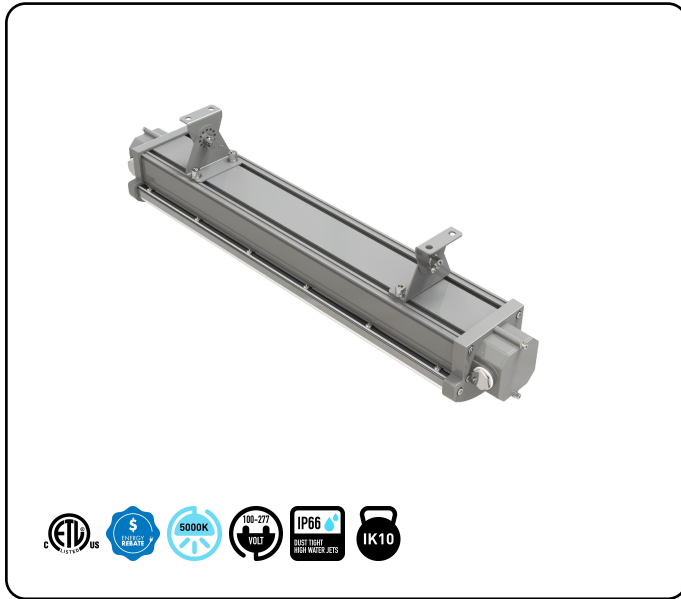

**Product Details**

**SKU:** MLLG-LED-EXPLF4-80-50-C1D2-V2

**Web ID:** 2014

**Key Features:** Wattage: 80 - Lumens: 11200 - Lumens Per Watt: 140 - Replaces: 250 Watt Metal Halide - Voltage: 100V-277V - Expl Rating: Class 1 Division 2 or Class 2 Division 2 - Color Temperature: 5000K - CRI: 70 - Dimming: 1-10V - Beam Angles: 120 - Lifespan: 50 000 (L70) hours - Mounting: Bracket or Surface or Wall - Fixture Color: Gray - Frequency: 50-60Hz - Power Factor: .95 - THD: 10%

**Durable Construction:** Housing: Copper Free Aluminum - IP Rating: IP66 - IK Rating: IK10 - Operating Temperature: -40 F to 140 F - Certifications: ETL | Rebate Eligible - Warranty: 5 years

**Features/Accessories:** Explosion Proof C1D2 - Dimming: 1-10V

**Measurements:** Dimensions: 47 in X 4.7 in X 9.5 in - Weight: 20 lbs

**Notes:** Class 1 Division 2 Group B C D - Class 2 Division 2 Groups F G - Class 3 - Wet Locations (UL 1598 / UL1598A) - UL844 - CSA - ATEX - IECEx

**Product Specifications**

<b>Watts:</b>	80	<b>Dimmable:</b>	1-10V
<b>Lumens:</b>	11200	<b>Beam Angle:</b>	120 deg
<b>Lumens/Watt:</b>	140	<b>Frequency:</b>	50-60Hz
<b>Replaces:</b>	250 Watt Metal Halide	<b>Power Factor:</b>	>.95
<b>Color Temp:</b>	5000K	<b>THD:</b>	< 10%
<b>CRI:</b>	70+	<b>Housing:</b>	Copper Free Aluminum
<b>IP Rating:</b>	IP66	<b>Fixture Color:</b>	Gray
<b>IK Rating:</b>	IK10	<b>Mount:</b>	Bracket   Surface   Wall
<b>Voltage:</b>	100V-277V	<b>Dimensions:</b>	47 in X 4.7 in X 9.5 in
<b>Operating Temp:</b>	-40 degF to 140 degF	<b>Weight:</b>	20 lbs
<b>Rated Life:</b>	50,000 (L70) hours	<b>Warranty:</b>	5 years