



Commercial Lighting



Industrial Lighting



Sports Lighting

MLLG-LED-LIN-VP Vapor Tight Product Family



**Why
contractors
choose us**



Free Lighting
Plans to ensure
customer
satisfaction



Dedicated
Lighting
Specialist for
each project



Large
inventory of
LED Lights

Table of Contents

	Page Number
- MLLG-AL-LED-LIN-VP4-56-CC	3
- MLLG-AL-LED-LIN-VP4-56-CC-10EM	4
- MLLG-AL-LED-LIN-VP8-120-CC	5
- MLLG-AL-LED-LIN-VP8-120-CC-20EM	6
- MLLG-WD-LED-LIN-VP2-25-CC	7
- MLLG-WD-LED-LIN-VP4-45-CC	8
- MLLG-WD-LED-LIN-VP4-200-CC	9
- MLLG-X-LED-LIN-VP8-80-CC	10
- MLLG-LS-LED-LIN-VP-60-CC	11
- MLLG-LN-LED-VTJJ-21-50	12

32 / 48 / 56 Watt Adjustable 4 Foot LED Vapor Proof Light



Product Details

SKU: MLLG-AL-LED-LIN-VP4-56-CC

Web ID: 1679

32 | 48 | 56 Watt LED vapor proof fixture produces 4471 | 6155 | 7253 lumens at 140 lumens/watt replacing 100 | 150 Watt Metal Halide. It has a polycarbonate waterproof fixture and a frosted lens. This vapor-proof fixture is impact-resistant. Multiple fixtures can also be linked together.

The fixture comes with a No dimmable 100V-277V LED Driver. This fixture allows you to adjust the color temperature: 3500K or 4000K or 5000K. This fixture is Wet location IP66 rated and works in temperatures ranging from -40 F to 122 F.

Product Specifications

Watts:	32 48 56	Dimmable:	No
Lumens:	4471 6155 7253	Beam Angle:	120°
Lumens/Watt:	140	Frequency:	50-60Hz
Replaces:	100 150 Watt Metal Halide	Power Factor:	> .90
Color Temp:	3500K 4000K 5000K	Housing:	Polycarbonate
CRI:	80+	Fixture Color:	White
IP Rating:	IP66	Mounting:	Surface Wall
Input Voltage:	100V-277V	Dimensions:	48 1/8 in x 3 9/16 in
Surge Protection:	6KV	Weight:	5 lbs
Operating Temp:	-40°F to +122°F	Warranty:	5 years
Rated Life:	50,000 (L70) hours		

32 / 48 / 56 Watt Adjustable 4 Foot LED Vapor Proof Light



Product Details

SKU: MLLG-AL-LED-LIN-VP4-56-CC-10EM

Web ID: 1899

32 | 48 | 56 Watt LED vapor proof fixture produces 4471 | 6155 | 7253 lumens at 140 lumens/watt replacing 100 | 150 Watt Metal Halide. It has a polycarbonate waterproof fixture and a frosted lens. This vapor-proof fixture is impact-resistant. Multiple fixtures can also be linked together.

The fixture comes with a No dimmable 100V-277V LED Driver. This fixture allows you to adjust the color temperature: 3500K or 4000K or 5000K. This fixture is Wet location IP66 rated and works in temperatures ranging from -40 F to 122 F. Emergency Backup provides 10 Watts of LED Lighting when the power is cut.

Product Specifications

Watts:	32 48 56	Dimmable:	No
Lumens:	4471 6155 7253	Beam Angle:	120°
Lumens/Watt:	140	Frequency:	50-60Hz
Replaces:	100 150 Watt Metal Halide	Power Factor:	> .90
Color Temp:	3500K 4000K 5000K	Housing:	Polycarbonate
CRI:	80+	Fixture Color:	White
IP Rating:	IP66	Mounting:	Surface Wall
Input Voltage:	100V-277V	Dimensions:	48 1/8 in x 3 9/16 in
Surge Protection:	6KV	Weight:	5 lbs
Operating Temp:	-40°F to +122°F	Warranty:	5 years
Rated Life:	50,000 (L70) hours		

64 / 96 / 120 Watt Adjustable 8 Foot LED Vapor Proof Light



Product Details

SKU: MLLG-AL-LED-LIN-VP8-120-CC

Web ID: 1900

64 | 96 | 120 Watt LED vapor proof fixture produces 9258 | 13773 | 17359 lumens at 140 lumens/watt replacing 250 | 400 Watt Metal Halide. It has a polycarbonate waterproof fixture and a frosted lens. This vapor-proof fixture is impact-resistant. Multiple fixtures can also be linked together.

The fixture comes with a No dimmable 100V-277V LED Driver. This fixture allows you to adjust the color temperature: 3500K or 4000K or 5000K. This fixture is Wet location IP66 rated and works in temperatures ranging from -40 F to 122 F.

Product Specifications

Watts:	64 96 120	Dimmable:	No
Lumens:	9258 13773 17359	Beam Angle:	120°
Lumens/Watt:	140	Frequency:	50-60Hz
Replaces:	250 400 Watt Metal Halide	Power Factor:	> .90
Color Temp:	3500K 4000K 5000K	Housing:	Polycarbonate
CRI:	80+	Fixture Color:	White
IP Rating:	IP66	Mounting:	Surface Wall
Input Voltage:	100V-277V	Dimensions:	94 3/4 in x 3 9/16 in
Surge Protection:	6KV	Weight:	9 lbs
Operating Temp:	-40°F to +122°F	Warranty:	5 years
Rated Life:	50,000 (L70) hours		

64 / 96 / 120 Watt Adjustable 8 Foot LED Vapor Proof Light



Product Details

SKU: MLLG-AL-LED-LIN-VP8-120-CC-20EM

Web ID: 1901

64 | 96 | 120 Watt LED vapor proof fixture produces 9258 | 13773 | 17359 lumens at 140 lumens/watt replacing 250 | 400 Watt Metal Halide. It has a polycarbonate waterproof fixture and a frosted lens. This vapor-proof fixture is impact-resistant. Multiple fixtures can also be linked together.

The fixture comes with a No dimmable 100V-277V LED Driver. This fixture allows you to adjust the color temperature: 3500K or 4000K or 5000K. This fixture is Wet location IP66 rated and works in temperatures ranging from -40 F to 122 F. Emergency Backup provides 20 Watts of LED Light when the power is cut.

Product Specifications

Watts:	64 96 120	Dimmable:	No
Lumens:	9258 13773 17359	Beam Angle:	120°
Lumens/Watt:	140	Frequency:	50-60Hz
Replaces:	250 400 Watt Metal Halide	Power Factor:	> .90
Color Temp:	3500K 4000K 5000K	Housing:	Polycarbonate
CRI:	80+	Fixture Color:	White
IP Rating:	IP66	Mounting:	Surface Wall
Input Voltage:	100V-277V	Dimensions:	94 3/4 in x 3 9/16 in
Surge Protection:	6KV	Weight:	9 lbs
Operating Temp:	-40°F to +122°F	Warranty:	5 years
Rated Life:	50,000 (L70) hours		

25 Watt LED Vapor Tight Light | 3550 Lumens | 4000K / 5000K Adjustable



Product Details

SKU: MLLG-WD-LED-LIN-VP2-25-CC

Web ID: 2143

25 Watts LED vapor proof fixture produces 3550 lumens at 142 lumens/watt replacing 100 Watt Metal Halide.

The fixture comes with a 0-10V dimmable 100V-277V LED Driver. This fixture is color temperature adjustable: 4000K or 5000K. This fixture is Wet location IP65 rated and works in temperatures ranging from -22 F to 113 F.

Product Specifications

Watts:	25	Dimmable:	0-10V
Lumens:	3550	Beam Angle:	120°
Lumens/Watt:	142	Optics:	Polycarbonate
Replaces:	100 Watt Metal Halide	Frequency:	50-60Hz
Color Temp:	4000K 5000K	Power Factor:	> .95
CRI:	80+	Housing:	Polycarbonate
IP Rating:	IP65	Fixture Color:	White
Input Voltage:	100V-277V	Mounting:	Surface Wall
Operating Temp:	-22°F to +113°F	Dimensions:	23.66 in L x 4.48 in W x 3.54 in H
Rated Life:	70,000 hours	Weight:	4 lbs
		Warranty:	5 years

34 / 38 / 45 Wattage Adjustable LED Vapor Tight Light | 4900 to 6500 Lumens



Product Details

SKU: MLLG-WD-LED-LIN-VP4-45-CC

Web ID: 2144

34 | 38 | 45 Watts Changeable LED vapor proof fixture produces 4900 | 5400 | 6500 lumens at 145 lumens/watt replacing 175 Watt Metal Halide.

The fixture comes with a 0-10V dimmable 100V-277V LED Driver. This fixture is color temperature adjustable: 4000K or 5000K. This fixture is Wet location IP65 rated and works in temperatures ranging from -40 F to 104 F.

Product Specifications

Watts:	34 38 45	Dimmable:	0-10V
Lumens:	4900 5400 6500	Beam Angle:	120°
Lumens/Watt:	145	Optics:	Polycarbonate
Replaces:	175 Watt Metal Halide	Frequency:	50-60Hz
Color Temp:	4000K 5000K	Power Factor:	> .90
CRI:	80+	Housing:	Polycarbonate
IP Rating:	IP65	Fixture Color:	White
Input Voltage:	100V-277V	Mounting:	Chain-Cable Surface (std)
Operating Temp:	-40°F to +104°F	Dimensions:	47.5 in L x 10.5 in W x 4.5 in H
Rated Life:	100,000 (L70) hours	Weight:	16.5 lbs
		Warranty:	5 years

155 / 185 / 200 Wattage Adjustable LED Vapor Tight Light



Product Details

SKU: MLLG-WD-LED-LIN-VP4-200-CC

Web ID: 2145


Powerful 155 | 185 | 200 Watts Changeable LED vapor proof fixture produces 24800 | 29600 | 32000 lumens at 160 lumens/watt replacing 400 Watt Metal Halide.

The fixture comes with a 0-10V dimmable 100V-277V LED Driver. This fixture is color temperature adjustable: 3500K or 4000K or 5000K. This fixture is Wet location IP65 rated and works in temperatures ranging from -40 F to 104 F.

Product Specifications

Watts:	155 185 200	Dimmable:	0-10V
Lumens:	24800 29600 32000	Beam Angle:	120°
Lumens/Watt:	160	Optics:	Polycarbonate
Replaces:	400 Watt Metal Halide	Frequency:	50-60Hz
Color Temp:	3500K 4000K 5000K	Power Factor:	> .90
CRI:	80+	Housing:	Polycarbonate
IP Rating:	IP65	Fixture Color:	White
Input Voltage:	100V-277V	Mounting:	Chain-Cable Surface (std)
Operating Temp:	-40°F to +104°F	Dimensions:	47.5 in L x 10.5 in W x 4.5 in H
Rated Life:	100,000 (L70) hours	Weight:	16.5 lbs
		Warranty:	5 years

60 / 70 / 80 Watt Adjustable 8 Foot LED Vapor Tight Light

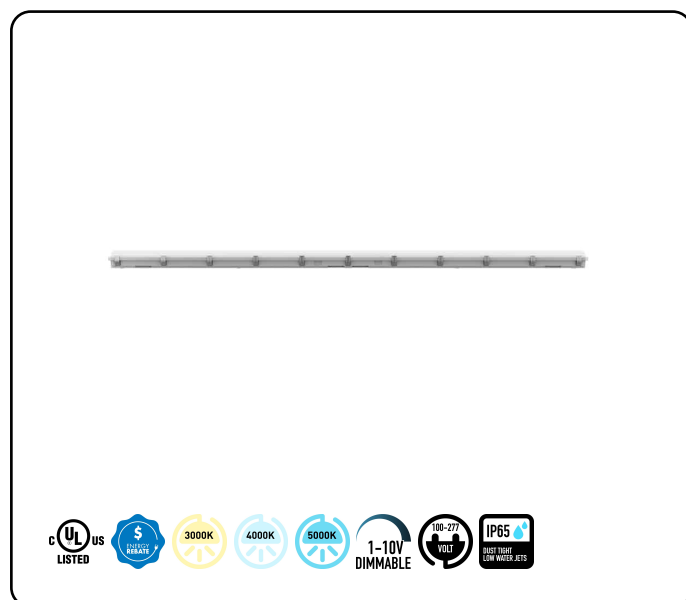

Product Details

SKU: MLLG-X-LED-LIN-VP8-80-CC

Web ID: 2119

60 | 70 | 80 Watts Adjustable LED vapor proof fixture produces 7800 | / 9100 | 10400 lumens at 130 lumens/watt replacing 250 Watt Metal Halide. This vapor proof fixture is impact resistant.

The fixture comes with a 0-10V dimmable 100V-277V LED Driver. This fixture is color temperature adjustable: 3000K or 4000K or 5000K. This fixture is Wet location IP65 rated and works in temperatures ranging from -40 F to 113 F.



Product Specifications

Watts:	60 70 80	Dimmable:	0-10V
Lumens:	7800 / 9100 10400	Beam Angle:	120°
Lumens/Watt:	130	Optics:	Polycarbonate
Replaces:	250 Watt Metal Halide	Frequency:	50-60Hz
Color Temp:	3000K 4000K 5000K	Power Factor:	> .90
CRI:	80+	Housing:	Polycarbonate
IP Rating:	IP65	Fixture Color:	Gray
Input Voltage:	100V-277V	Mounting:	Surface Wall
Operating Temp:	-40°F to +113°F	Dimensions:	94.5 in L x 4.3 in W x 3.5 in H
Rated Life:	70,000 hours	Weight:	9.5 lbs
		Warranty:	5 years

40 / 50 / 60 Watt Adjustable 4 Foot Vapor Proof Light | 5200 to 7800 Lumens



Product Details

SKU: MLLG-LS-LED-LIN-VP-60-CC

Web ID: 2048

40 | 50 | 60 Watts Adjustable LED vapor proof fixture produces 5200 | 6500 | 7800 lumens at 130 lumens/watt replacing 250 Watt Metal Halide. This vapor-proof fixture is impact-resistant.

The fixture comes with a No dimmable 100V-277V LED Driver. This fixture is color temperature adjustable: 3000K or 4000K or 5000K. This fixture is Wet location IP65 rated and works in temperatures ranging from -4 F to 104 F.

Product Specifications

Watts:	40 50 60	Dimmable:	No
Lumens:	5200 6500 7800	Beam Angle:	120°
Lumens/Watt:	130	Frequency:	50-60Hz
Replaces:	250 Watt Metal Halide	Power Factor:	> .90
Color Temp:	3000K 4000K 5000K	Housing:	Polycarbonate
CRI:	80+	Fixture Color:	White
IP Rating:	IP65	Mounting:	Chain-Cable Surface Wall
Input Voltage:	100V-277V	Dimensions:	47 in X 3.5 in X 5 in
Operating Temp:	-4°F to +104°F	Weight:	4.4 lbs
Rated Life:	50,000 (L70) hours	Warranty:	5 years

21 Watt LED Vapor Proof Jelly Jar Light | 2520 Lumens | 5000K | 100-277V



Product Details

SKU: MLLG-LN-LED-VTJJ-21-50

Web ID: 1979

21 Watt Jelly Jar LED vapor proof fixture produces 2520 lumens at 120 lumens/watt replacing 100 Watt Metal Halide. It has a Die Cast Aluminum body and Tempered Glass Dome with a Wire Guard. This vapor-proof fixture is impact-resistant.

The fixture comes with a 1-10V dimmable 100V-277V LED Driver. This fixture is available in color temperature: 5000K. This fixture is Wet location IP65 rated and works in temperatures ranging from -22 F to 104 F.

Product Specifications

Watts:	21	Dimmable:	1-10V
Lumens:	2520	Beam Angle:	160°
Lumens/Watt:	120	Frequency:	50-60Hz
Replaces:	100 Watt Metal Halide	Power Factor:	> .90
Color Temp:	5000K	Housing:	Die-Cast Aluminum
CRI:	80+	Fixture Color:	Gray
IP Rating:	IP65	Mounting:	Surface Wall
Input Voltage:	100V-277V	Dimensions:	12.64 H in x 5 in D
Operating Temp:	-22°F to +104°F	Weight:	4 lbs
Rated Life:	50,000 (L70) hours	Warranty:	5 years