



Commercial Lighting




Industrial Lighting



Sports Lighting

LLS Steel Light Pole Product Family

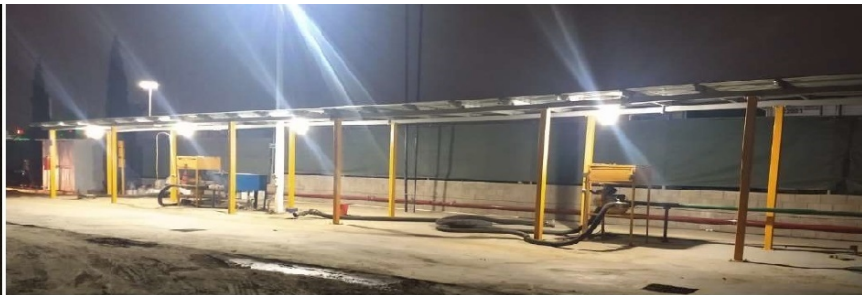

**Why
contractors
choose us**



Free Lighting
Plans to ensure
customer
satisfaction



Dedicated
Lighting
Specialist for
each project



Large
inventory of
LED Lights

Table of Contents

| | Page Number |
|-------------------------------------|-------------|
| - MLLG-WL-POLE-10FT-3-RD-BZ | 3 |
| - MLLG-WL-POLE-15-4SQ-DB-BZ-TN | 4 |
| - MLLG-WL-POLE-15-4RD-DB-BZ-TN | 5 |
| - MLLG-WL-POLE-15FT-4-SQ-[COLOR]-TN | 6 |
| - MLLG-WL-POLE-15FT-4-RD-BZ-TN | 7 |
| - MLLG-WL-POLE-20-4SQ-DB-BZ-TN | 8 |
| - MLLG-WL-POLE-20-4RD-DB-BZ-TN | 9 |
| - MLLG-WL-POLE-20FT-4-SQ-[COLOR]-TN | 10 |
| - MLLG-WL-POLE-20FT-4-RD-BZ-TN | 11 |
| - MLLG-WL-POLE-20FT-6-TRD-BZ-TN | 12 |
| - MLLG-WL-POLE-25FT-65-TRD-BZ-T | 13 |
| - MLLG-WL-POLE-25FT-4-RD-BZ-TN | 14 |
| - MLLG-WL-POLE-25FT-4-SQ-[COLOR]-TN | 15 |
| - MLLG-WL-POLE-30FT-5-SQ-[COLOR]-TN | 16 |
| - MLLG-WL-POLE-30FT-5-RD-BZ-TN | 17 |
| - MLLG-WL-POLE-30FT-7-TRD-BZ-TN | 18 |

10 Foot Steel Round Pole | 3 Inches Wide | Anchor Base



Product Details

SKU: MLLG-WL-POLE-10FT-3-RD-BZ


Web ID: 2020

Key Features
 Height: 10 ft Gauge: 11 Width: 3 in round Weight: 46 lbs
 Color: Bronze Bolt Circle: 8 in - 10 in Bolt Projection: 2.75 in EPA Rating
 70 mph: 28.2 EPA Rating 80 mph: 23.5 EPA Rating 90 mph: 20.1 EPA
 Rating 100 mph: 16.4 EPA Rating 110 mph: 13.3 EPA Rating 120 mph:
 11.6 Warranty: 1 Year 10 Feet steel pole 3 inches round. 11 gauge steel
 2 sides predrilled (180 Degree) and hole plugs included. Finish is
 hot-dip galvanized and powder coated architectural bronze in
 color. Includes polycarbonate pole top cover. Confirms to ASTM-A 500
 Grade B: Min Yield Strength-46000 PSI. Minimum Order: 2
 Disclaimer:
 LED Lighting Supply is not responsible for improper loading (ie what is
 mounted to the pole) use or foundation design of light poles.
 Dimensions and specifications of poles are subject to change without
 notice. Please be advised that our steel poles are covered solely by a
 1-year workmanship warranty which ensures that the poles are free
 from defects from the manufacturing process such as welds and
 structural integrity for a period of one year from the date of purchase.
 This warranty does not cover damage resulting from external factors
 misuse or normal wear and tear.

Product Specifications

| | | | |
|---------------------------|--------------|----------------------------|--------|
| Height: | 10 ft | EPA Rating 80 mph: | 23.5 |
| Gauge: | 11 | EPA Rating 90 mph: | 20.1 |
| Width: | 3 in round | EPA Rating 100 mph: | 16.4 |
| Weight: | 46 lbs | EPA Rating 110 mph: | 13.3 |
| Bolt Circle: | 8 in - 10 in | EPA Rating 120 mph: | 11.6 |
| Bolt Projection: | 2.75 in | Warranty: | 1 Year |
| EPA Rating 70 mph: | 28.2 | | |

15 Foot Above Grade Steel Square Light Pole | 4 Inches Wide | Direct Burial

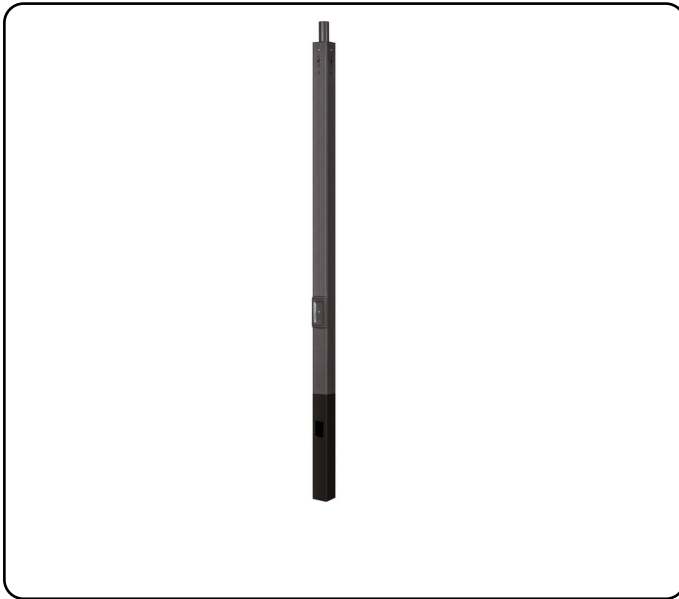

Product Details

SKU: MLLG-WL-POLE-15-4SQ-DB-BZ-TN


Web ID: 2113

Key Features Height: 18 ft Height Above Grade: 15 ft Buried Depth Below Grade: 3 ft Gauge: 11 Width: 4 in square Weight: 121 lbs Color: Architectural Bronze EPA Rating 90 mph: 11.1 EPA Rating 100 mph: 9.5 EPA Rating 110 mph: 7.9 EPA Rating 120 mph: 6.8 EPA Rating 130 mph: 5.2 Warranty: 1 Year 18-Foot Direct Burial Steel Pole 15-foot above grade height 4 Inch square 11 gauge steel. This 18 foot steel pole is hot-dip galvanized and powder coated architectural bronze in color. Includes 2 3/8 tenon. Conforms to ASTM-A 500 Grade B: Minimum Yield Strength of 46 000 PSI. NO RETURNS OR EXCHANGES ON LIGHT POLES. Please be advised that our steel poles are covered solely by a 1-year workmanship warranty which ensures that the poles are free from defects from the manufacturing process such as welds and structural integrity for a period of one year from the date of purchase. This warranty does not cover damage resulting from external factors misuse or normal wear and tear.

Product Specifications

| | | | |
|----------------------------------|----------------------|----------------------------|--------|
| Height: | 18 ft | EPA Rating 90 mph: | 11.1 |
| Height Above Grade: | 15 ft | EPA Rating 100 mph: | 9.5 |
| Buried Depth Below Grade: | 3 ft | EPA Rating 110 mph: | 7.9 |
| Gauge: | 11 | EPA Rating 120 mph: | 6.8 |
| Width: | 4 in square | EPA Rating 130 mph: | 5.2 |
| Weight: | 121 lbs | Warranty: | 1 Year |
| Color: | Architectural Bronze | | |

15 Foot Above Grade Steel Round Light Pole | 4 Inches Wide | Direct Burial

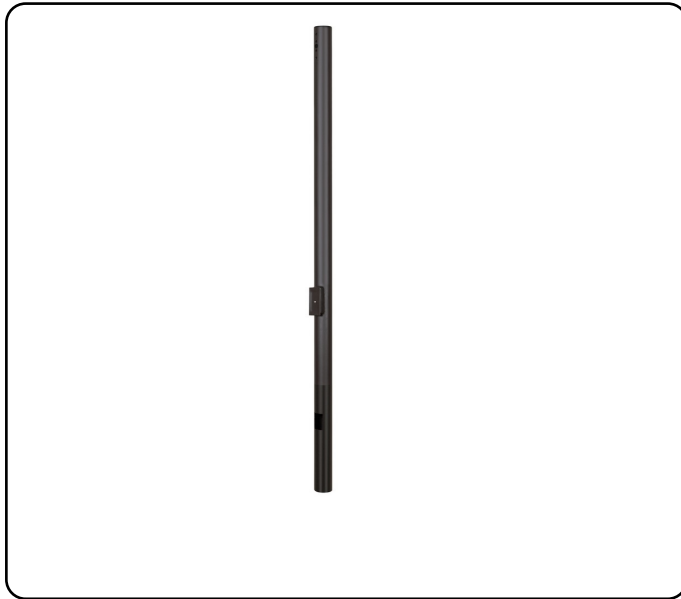

Product Details

SKU: MLLG-WL-POLE-15-4RD-DB-BZ-TN


Web ID: 2115

Key Features Height: 18 ft Height Above Grade: 15 ft Buried Depth Below Grade: 3 ft Gauge: 11 Width: 4 in round Weight: 99 lbs Color: Architectural Bronze EPA Rating 90 mph: 13.1 EPA Rating 100 mph: 11.5 EPA Rating 110 mph: 9.9 EPA Rating 120 mph: 7.4 EPA Rating 130 mph: 5.2 Warranty: 1 Year 18-Foot Direct Burial Steel Pole 15-foot above grade height 4 inches round and 11 gauge steel. Comes with 2 3/8 Tenon. This 18 foot steel pole is hot-dip galvanized and powder coated architectural bronze in color. Conforms to ASTM-A 500 Grade B: Minimum Yield Strength of 46 000 PSI. NO RETURNS OR EXCHANGES ON LIGHT POLES. Please be advised that our steel poles are covered solely by a 1-year workmanship warranty which ensures that the poles are free from defects from the manufacturing process such as welds and structural integrity for a period of one year from the date of purchase. This warranty does not cover damage resulting from external factors misuse or normal wear and tear.

Product Specifications

| | | | |
|----------------------------------|----------------------|----------------------------|--------|
| Height: | 18 ft | EPA Rating 90 mph: | 13.1 |
| Height Above Grade: | 15 ft | EPA Rating 100 mph: | 11.5 |
| Buried Depth Below Grade: | 3 ft | EPA Rating 110 mph: | 9.9 |
| Gauge: | 11 | EPA Rating 120 mph: | 7.4 |
| Width: | 4 in round | EPA Rating 130 mph: | 5.2 |
| Weight: | 99 lbs | Warranty: | 1 Year |
| Color: | Architectural Bronze | | |

15 Foot Square Steel Light Pole | 4 Inches Wide | Anchor Base

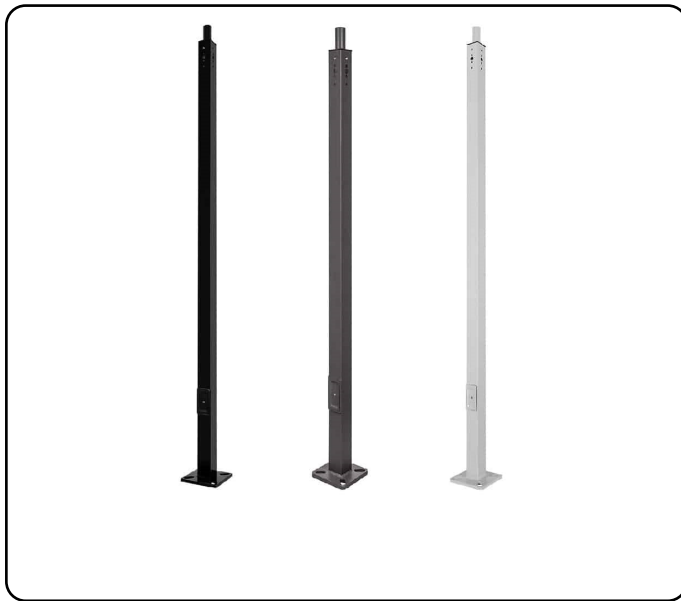

Product Details

SKU: MLLG-WL-POLE-15FT-4-SQ-[COLOR]-TN

Web ID: 1915

Key Features Height: 15 ft Color: Bronze | Black | White Gauge: 11 Width: 4 in square Weight: 134 lbs Bolt Circle: 8 in - 10 in Bolt Projection: 2.75 in EPA Rating 70 mph: 15.2 EPA Rating 80 mph: 13.5 EPA Rating 90 mph: 11.1 EPA Rating 100 mph: 9.5 EPA Rating 110 mph: 7.9 EPA Rating 120 mph: 6.8 Warranty: 1 Year Our 15 foot steel square light poles are 4 inches square and come with a 2 3/8 inch tenon. The 15 foot square steel light pole is hot-dip galvanized powder coated and then painted Bronze Black or White. This pole uses 11 gauge steel. Typical area lighting applications include office buildings industrial parks medical facilities and retail centers. Bolt Circle range 8-10 In bolt size 3/4x17x3 In 4 sides of the pole shaft are predrilled and hole plugs included. Conforms to ASTM-A 500 Grade B: Min Yield Strength-46000 PSI. Minimum Order: 2 Install kits are sold separately. Install kit includes anchor bolts positioning plate top cover and base cover.

Product Specifications

| | | | |
|-------------------------|------------------------|----------------------------|--------|
| Height: | 15 ft | EPA Rating 70 mph: | 15.2 |
| Color: | Bronze Black White | EPA Rating 80 mph: | 13.5 |
| Gauge: | 11 | EPA Rating 90 mph: | 11.1 |
| Width: | 4 in square | EPA Rating 100 mph: | 9.5 |
| Weight: | 134 lbs | EPA Rating 110 mph: | 7.9 |
| Bolt Circle: | 8 in - 10 in | EPA Rating 120 mph: | 6.8 |
| Bolt Projection: | 2.75 in | Warranty: | 1 Year |

15 Foot Steel Round Pole | 4 Inches Wide | Anchor Base



Product Details

SKU: MLLG-WL-POLE-15FT-4-RD-BZ-TN

Web ID: 1914

Key Features
 Height: 15 ft Gauge: 11 Width: 4 in round Weight: 90 lbs
 Bolt Circle: 8 in - 10 in Bolt Projection: 2.75 in EPA Rating 70 mph: 18.2
 EPA Rating 80 mph: 15.5 EPA Rating 90 mph: 13.1 EPA Rating 100 mph:
 11.5 EPA Rating 110 mph: 9.9 EPA Rating 120 mph: 7.4 Warranty: 1 Year
 15 Feet steel pole 4 inches round. 11 gauge steel 2 sides predrilled (180
 Degree) and hole plugs included. Finish is hot-dip galvanized and
 powder coated architectural bronze in color. Comes with 2 3/8 Tenon
 and polycarbonate pole top cover. Confirms to ASTM-A 500 Grade B:
 Min Yield Strength-46000 PSI. Minimum Order: 2

Product Specifications

| | | | |
|---------------------------|--------------|----------------------------|--------|
| Height: | 15 ft | EPA Rating 80 mph: | 15.5 |
| Gauge: | 11 | EPA Rating 90 mph: | 13.1 |
| Width: | 4 in round | EPA Rating 100 mph: | 11.5 |
| Weight: | 90 lbs | EPA Rating 110 mph: | 9.9 |
| Bolt Circle: | 8 in - 10 in | EPA Rating 120 mph: | 7.4 |
| Bolt Projection: | 2.75 in | Warranty: | 1 Year |
| EPA Rating 70 mph: | 18.2 | | |

20 Foot Above Grade Steel Square Light Pole | 4 Inches Wide | Direct Burial



Product Details

SKU: MLLG-WL-POLE-20-4SQ-DB-BZ-TN


Web ID: 2114

Key Features Height: 25 ft Height Above Grade: 20 ft Buried Depth Below Grade: 5 ft Gauge: 11 Width: 4 in square Weight: 167 lbs Color: Architectural Bronze EPA Rating 90 mph: 7.5 EPA Rating 100 mph: 6.2 EPA Rating 110 mph: 4.2 EPA Rating 120 mph: 3.6 EPA Rating 130 mph: 2.2 Warranty: 1 Year 25-Foot Direct Burial Steel Pole 20-foot above grade height 4 Inches square 11 gauge steel. This 25 foot steel pole is hot-dip galvanized and powder coated architectural bronze in color. Comes with 2 3/8 Tenon. Conforms to ASTM-A 500 Grade B: Minimum Yield Strength of 46 000 PSI. NO RETURNS OR EXCHANGES ON LIGHT POLES. Please be advised that our steel poles are covered solely by a 1-year workmanship warranty which ensures that the poles are free from defects from the manufacturing process such as welds and structural integrity for a period of one year from the date of purchase. This warranty does not cover damage resulting from external factors misuse or normal wear and tear.

Product Specifications

| | | | |
|----------------------------------|----------------------|----------------------------|--------|
| Height: | 25 ft | EPA Rating 90 mph: | 7.5 |
| Height Above Grade: | 20 ft | EPA Rating 100 mph: | 6.2 |
| Buried Depth Below Grade: | 5 ft | EPA Rating 110 mph: | 4.2 |
| Gauge: | 11 | EPA Rating 120 mph: | 3.6 |
| Width: | 4 in square | EPA Rating 130 mph: | 2.2 |
| Weight: | 167 lbs | Warranty: | 1 Year |
| Color: | Architectural Bronze | | |

20 Foot Above Grade Steel Round Direct Burial Light Pole | 4 Inches Wide

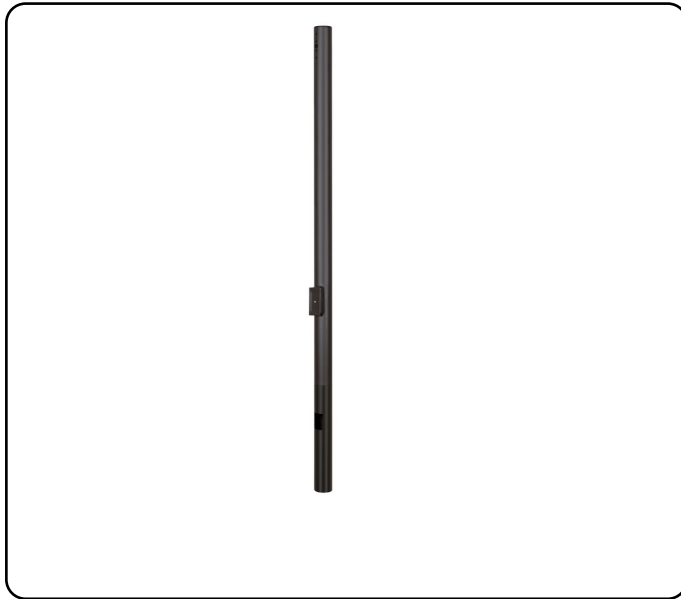

Product Details

SKU: MLLG-WL-POLE-20-4RD-DB-BZ-TN


Web ID: 2116

Key Features Height: 25 ft Height Above Grade: 20 ft Buried Depth Below Grade: 5 ft Gauge: 11 Width: 4 in round Weight: 132 lbs Color: Architectural Bronze EPA Rating 90 mph: 8.8 EPA Rating 100 mph: 7.2 EPA Rating 110 mph: 6.1 EPA Rating 120 mph: 4.6 EPA Rating 130 mph: 2.2 Warranty: 1 Year 25-Foot Direct Burial Steel Pole 20-foot above grade 4 inches round 11 gauge steel. This 25 foot steel pole is hot-dip galvanized and powder coated architectural bronze in color. Comes with 2 3/8 Tenon. Conforms to ASTM-A 500 Grade B: Minimum Yield Strength of 46 000 PSI. NO RETURNS OR EXCHANGES ON LIGHT POLES. Please be advised that our steel poles are covered solely by a 1-year workmanship warranty which ensures that the poles are free from defects from the manufacturing process such as welds and structural integrity for a period of one year from the date of purchase. This warranty does not cover damage resulting from external factors misuse or normal wear and tear.

Product Specifications

| | | | |
|----------------------------------|----------------------|----------------------------|--------|
| Height: | 25 ft | EPA Rating 90 mph: | 8.8 |
| Height Above Grade: | 20 ft | EPA Rating 100 mph: | 7.2 |
| Buried Depth Below Grade: | 5 ft | EPA Rating 110 mph: | 6.1 |
| Gauge: | 11 | EPA Rating 120 mph: | 4.6 |
| Width: | 4 in round | EPA Rating 130 mph: | 2.2 |
| Weight: | 132 lbs | Warranty: | 1 Year |
| Color: | Architectural Bronze | | |

20 Foot Steel Square Light Pole | 4 Inches Wide | Anchor Base

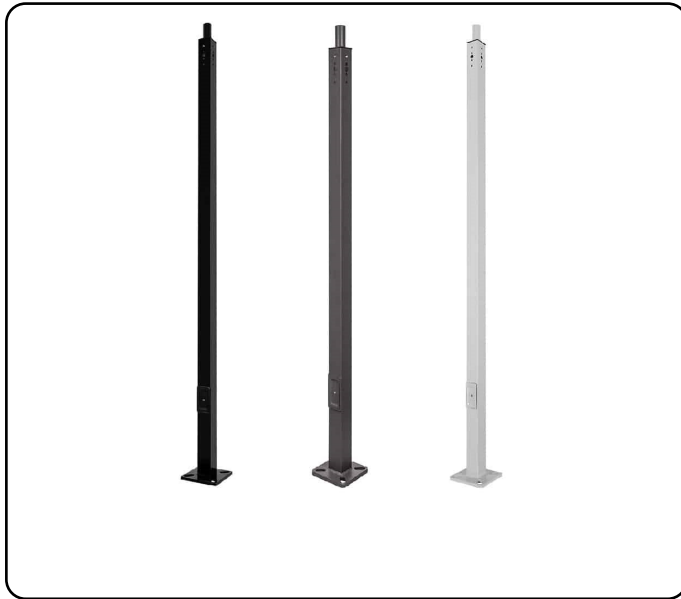

Product Details

SKU: MLLG-WL-POLE-20FT-4-SQ-[COLOR]-TN

Web ID: 1912

Key Features Height: 20 ft Gauge: 11 Width: 4 in square Weight: 169 lbs Bolt Circle: 8 in - 10 in Bolt Projection: 2.75 in EPA Rating 70 mph: 10.2 EPA Rating 80 mph: 9.3 EPA Rating 90 mph: 7.5 EPA Rating 100 mph: 6.2 EPA Rating 110 mph: 4.2 EPA Rating 120 mph: 3.6 Warranty: 1 Year Our 20 foot steel square light poles are 4 inches square and comes with a removable pole cap. The 20 foot square steel light pole is hot-dip galvanized powder coated and then painted Bronze Black or White. Our 20 ft light pole uses 11 gauge steel. Square steel poles are commonly used for requirements for commercial parking lot projects. Bolt Circle range 8-10 In bolt size 3/4x17x3 In 4 sides of the pole shaft are predrilled and hole plugs included. Conforms to ASTM-A 500 Grade B: Min Yield Strength-46000 PSI. Minimum Order: 2

Product Specifications

| | | | |
|---------------------------|--------------|----------------------------|--------|
| Height: | 20 ft | EPA Rating 80 mph: | 9.3 |
| Gauge: | 11 | EPA Rating 90 mph: | 7.5 |
| Width: | 4 in square | EPA Rating 100 mph: | 6.2 |
| Weight: | 169 lbs | EPA Rating 110 mph: | 4.2 |
| Bolt Circle: | 8 in - 10 in | EPA Rating 120 mph: | 3.6 |
| Bolt Projection: | 2.75 in | Warranty: | 1 Year |
| EPA Rating 70 mph: | 10.2 | | |

20 Foot Steel Round Pole | 4 Inches Wide | Anchor Base



Product Details

SKU: MLLG-WL-POLE-20FT-4-RD-BZ-TN


Web ID: 1917

Key Features
 Height: 20 ft Gauge: 11 Size: 4 in round Weight: 117 lbs
 Bolt Circle: 8 in - 10 in Bolt Projection: 2.75 in EPA Rating 70 mph: 12.2
 EPA Rating 80 mph: 10.3 EPA Rating 90 mph: 9.0 EPA Rating 100 mph: 7.2
 EPA Rating 110 mph: 6.0 EPA Rating 120 mph: 4.6 Warranty: 1 Year
 Our 20 foot round steel light poles are 4 inches round and come with a removable pole cap. The 20 ft steel light pole is hot-dip galvanized and powder coated architectural bronze in color. Our 20 ft light pole uses 11 gauge steel. Round steel poles are commonly used for requirements for commercial parking lot projects. Our 20 foot steel light pole comes with a 2 3/8 Tenon. Bolt Circle range 8-10 In bolt size 3/4x17x3 In 2 sides of the pole shaft are predrilled and hole plugs included. Conforms to wall thickness requirements of ASTM-A 500 Grade B: Min Yield Strength-46000 PSI. Minimum Order: 2
 Accessories Available: MLLG-WL-POLE-Anchor-Bolts - Anchor Bolts for Square / Round Poles MLLG-WL-POLE-RD-ABPP - Anchor Bolts positioning plate for Round Pole. MLLG-WL-POLE-4IN-RD-Base-Cover - 4 Inch Pole Round Base Cover. Dark Bronze. MLLG-WD-POLE-BH-2-BZ - 2 Fixture 180 Degree Bullhorn mount - Bronze. Mounts on a 2 3/8 inch Tenon. MLLG-WD-POLE-BH-3-BZ - 3 Fixture 180 Degree Bullhorn mount - Bronze. Mounts on a 2 3/8 inch Tenon. MLLG-WD-POLE-BH-4-BZ - 4 Fixture 180 Degree Bullhorn mount - Bronze. Mounts on a 2 3/8 inch Tenon.

Product Specifications

| | | | |
|---------------------------|--------------|----------------------------|--------|
| Height: | 20 ft | EPA Rating 80 mph: | 10.3 |
| Gauge: | 11 | EPA Rating 90 mph: | 9.0 |
| Size: | 4 in round | EPA Rating 100 mph: | 7.2 |
| Weight: | 117 lbs | EPA Rating 110 mph: | 6.0 |
| Bolt Circle: | 8 in - 10 in | EPA Rating 120 mph: | 4.6 |
| Bolt Projection: | 2.75 in | Warranty: | 1 Year |
| EPA Rating 70 mph: | 12.2 | | |

20 Foot Round Tapered Steel Light Pole | 6 Inch Base Diameter | Anchor Base

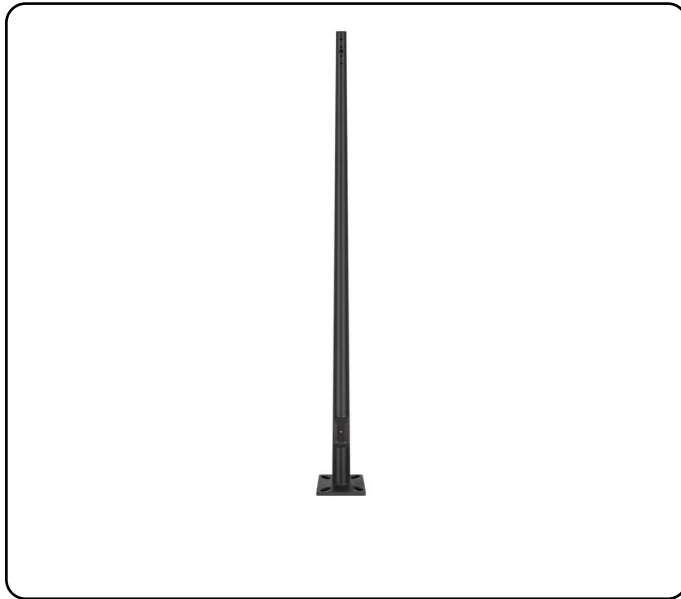

Product Details

SKU: MLLG-WL-POLE-20FT-6-TRD-BZ-TN


Web ID: 2169

Key Features
 Height: 20 ft Gauge: 11 Width: 6 In at Base / 3 In at Top
 Weight: 123 lbs Bolt Circle: 9 in - 11 in Bolt Projection: 3.15 in Color: Architectural Bronze
 EPA Rating 70 mph: 13.1 EPA Rating 80 mph: 11.9 EPA Rating 90 mph: 10.8
 EPA Rating 100 mph: 8.8 EPA Rating 110 mph: 7.5 EPA Rating 120 mph: 5.8
 EPA Rating 140 mph: 2.8 EPA Rating 160 mph: 1.1
 Warranty: 1 Year
 20 Foot Round Tapered Steel Pole 6 Inch Diameter at Base 3 Inch at top. Hot Dip Galvanized with Bronze Powder coating finish 11 gauge 2 sides predrilled (180 Degrees) and hole plugs included. Confirms to ASTM-A 500 Grade B: Min Yield Strength 46000 PSI.
 Accessories
 MLLG-WL-POLE-TRD-6-KIT: Installation Kit for 6-inch tapered round pole. Consists of Anchor Bolts a Positioning Plate and a Base Cover
NO RETURNS OR EXCHANGES ON LIGHT POLES. Please be advised that our steel poles are covered solely by a 1-year workmanship warranty which ensures that the poles are free from defects from the manufacturing process such as welds and structural integrity for a period of one year from the date of purchase. This warranty does not cover damage resulting from external factors misuse or normal wear and tear.

Product Specifications

| | | | |
|---------------------------|----------------------------|----------------------------|--------|
| Height: | 20 ft | EPA Rating 80 mph: | 11.9 |
| Gauge: | 11 | EPA Rating 90 mph: | 10.8 |
| Width: | 6 In at Base / 3 In at Top | EPA Rating 100 mph: | 8.8 |
| Weight: | 123 lbs | EPA Rating 110 mph: | 7.5 |
| Bolt Circle: | 9 in - 11 in | EPA Rating 120 mph: | 5.8 |
| Bolt Projection: | 3.15 in | EPA Rating 140 mph: | 2.8 |
| Color: | Architectural Bronze | EPA Rating 160 mph: | 1.1 |
| EPA Rating 70 mph: | 13.1 | Warranty: | 1 Year |

25 Foot Round Tapered Steel Light Pole | 6.5 Inch Base Diameter | Anchor Base

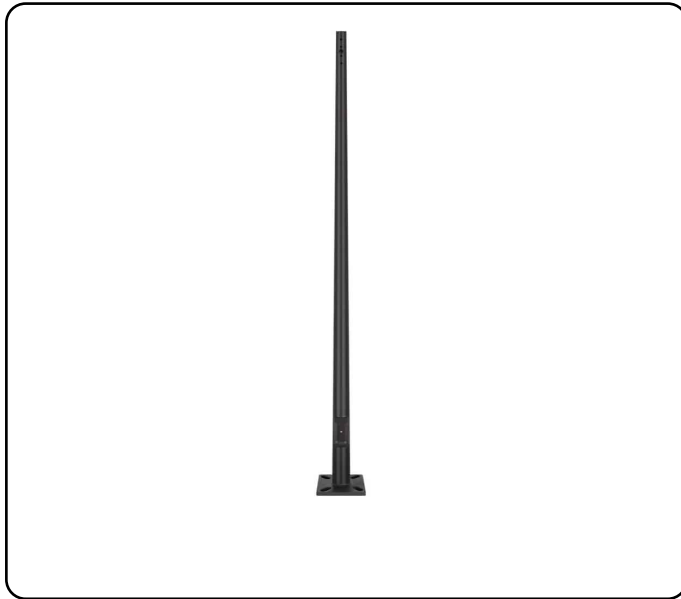

Product Details

SKU: MLLG-WL-POLE-25FT-65-TRD-BZ-T

Web ID: 2170

Key Features Height: 25 ft Gauge: 11 Width: 6.5 In at Base / 3 In at Top Weight: 163 lbs Bolt Circle: 9 in - 11 in Bolt Projection: 3.15 Color: Architectural Bronze EPA Rating 70 mph: 12.9 EPA Rating 80 mph: 9.9 EPA Rating 90 mph: 8.7 EPA Rating 100 mph: 7.3 EPA Rating 110 mph: 6.6 EPA Rating 120 mph: 5.1 EPA Rating 140 mph: 2.8 EPA Rating 150 mph: 1.4 Warranty: 1 Year 25 Foot Round Tapered Steel Pole 6.5 Inch Diameter at Base 3 Inch at top. Hot Dip Galvanized with Bronze Powder coating finish 11 gauge 2 sides predrilled (180 Degrees) and hole plugs included. Confirms to ASTM-A 500 Grade B: Min Yield Strength 46000 PSI. Accessories MLLG-WL-POLE-TRD-6.5-KIT: Installation Kit for 6.5-inch tapered round pole. Consists of Anchor Bolts a Positioning Plate and a Base Cover NO RETURNS OR EXCHANGES ON LIGHT POLES. Please be advised that our steel poles are covered solely by a 1-year workmanship warranty which ensures that the poles are free from defects from the manufacturing process such as welds and structural integrity for a period of one year from the date of purchase. This warranty does not cover damage resulting from external factors misuse or normal wear and tear.

Product Specifications

| | | | |
|---------------------------|------------------------------|----------------------------|--------|
| Height: | 25 ft | EPA Rating 80 mph: | 9.9 |
| Gauge: | 11 | EPA Rating 90 mph: | 8.7 |
| Width: | 6.5 In at Base / 3 In at Top | EPA Rating 100 mph: | 7.3 |
| Weight: | 163 lbs | EPA Rating 110 mph: | 6.6 |
| Bolt Circle: | 9 in - 11 in | EPA Rating 120 mph: | 5.1 |
| Bolt Projection: | 3.15 | EPA Rating 140 mph: | 2.8 |
| Color: | Architectural Bronze | EPA Rating 150 mph: | 1.4 |
| EPA Rating 70 mph: | 12.9 | Warranty: | 1 Year |

25 Foot Steel Round Pole | 4 Inches Wide | Anchor Base



Product Details

SKU: MLLG-WL-POLE-25FT-4-RD-BZ-TN


Web ID: 1918

Key Features
 Height: 25 ft Gauge: 11 Width: 4 in round Weight: 139 lbs
 Bolt Circle: 8 in - 10 in Bolt Projection: 2.75 in EPA Rating 70 mph: 11.8
 EPA Rating 80 mph: 8.9 EPA Rating 90 mph: 7.7 EPA Rating 100 mph: 6.1
 EPA Rating 110 mph: 5.6 EPA Rating 120 mph: 4.2 Warranty: 1 Year
 Our 25 foot round steel light poles are 4 inches square and come with a removable pole cap. The 25 ft steel light pole is hot-dip galvanized and powder coated architectural bronze in color. Our 25 ft light pole uses 11 gauge steel. Round steel poles are commonly used for parking lots. Comes with a 2 3/8 Tenon. Bolt Circle range 8-10 In bolt size 3/4x17x3 In 2 sides of the pole shaft are predrilled and hole plugs included. Conforms to wall thickness requirements of ASTM-A 500 Grade B: Min Yield Strength-46000 PSI. Minimum Order: 2
 Accessories Available: MLLG-WL-POLE-Anchor-Bolts - Anchor Bolts for Square / Round Poles MLLG-WL-POLE-RD-ABPP - Anchor Bolts positioning plate for Round Pole. MLLG-WL-POLE-4IN-RD-Base-Cover - 4 Inch Pole Round Base Cover. Dark Bronze. MLLG-WL-POLE-RDTA-4In-BZ - Round Pole Top Tenon Adapter - 4 Inch Round to 2 3/8 Inch Tenon - Bronze MLLG-WD-POLE-BH-2-BZ - 2 Fixture 180 Degree Bullhorn mount - Bronze. Mounts on a 2 3/8 inch Tenon. MLLG-WD-POLE-BH-3-BZ - 3 Fixture 180 Degree Bullhorn mount - Bronze. Mounts on a 2 3/8 inch Tenon. MLLG-WD-POLE-BH-4-BZ - 4 Fixture 180 Degree Bullhorn mount - Bronze. Mounts on a 2 3/8 inch Tenon.

Product Specifications

| | | | |
|---------------------------|--------------|----------------------------|--------|
| Height: | 25 ft | EPA Rating 80 mph: | 8.9 |
| Gauge: | 11 | EPA Rating 90 mph: | 7.7 |
| Width: | 4 in round | EPA Rating 100 mph: | 6.1 |
| Weight: | 139 lbs | EPA Rating 110 mph: | 5.6 |
| Bolt Circle: | 8 in - 10 in | EPA Rating 120 mph: | 4.2 |
| Bolt Projection: | 2.75 in | Warranty: | 1 Year |
| EPA Rating 70 mph: | 11.8 | | |

25 Foot Bronze Steel Square Pole | 4 Inches Wide | Anchor Base

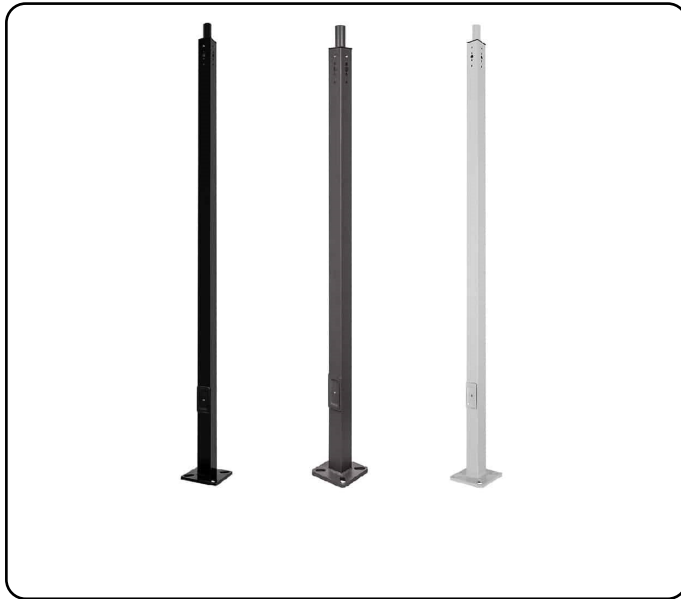

Product Details

SKU: MLLG-WL-POLE-25FT-4-SQ-[COLOR]-TN


Web ID: 1916

Key Features Height: 25 ft Color: Bronze | Black | White Gauge: 11 Width: 4 in square Weight: 190 lbs Bolt Circle: 8 in - 10 in Bolt Projection: 2.75 in EPA Rating 70 mph: 8.9 EPA Rating 80 mph: 6.9 EPA Rating 90 mph: 5.7 EPA Rating 100 mph: 4.1 EPA Rating 110 mph: 3.6 EPA Rating 120 mph: 2.2 Warranty: 1 Year Our 25 foot steel square light poles are 4 inches square and come with a 2 3/8 inch tenon. The 25 foot square steel light pole is hot-dip galvanized powder coated and painted bronze black or white. Our 25 foot bronze steel square pole uses 11 gauge steel. Square steel poles are commonly used for parking lot lighting. Install kits are sold separately. Install kit includes anchor bolts positioning plate top cover and base cover. Disclaimer: LED Lighting Supply is not responsible for improper loading of light fixtures or other attachments use or foundation design of light poles. Final pole assembly is the responsibility of the purchaser. Dimensions and specifications of a 25 foot steel square light pole are subject to change without notice. See the data sheet for current pole data charts. Custom sizing is only available for large order quantities. Please be advised that our steel poles are covered solely by a 1-year workmanship warranty which ensures that the poles are free from defects from the manufacturing process such as welds and structural integrity for a period of one year from the date of purchase. This warranty does not cover damage resulting from external factors misuse or normal wear and tear.

Product Specifications

| | | | |
|-------------------------|------------------------|----------------------------|--------|
| Height: | 25 ft | EPA Rating 70 mph: | 8.9 |
| Color: | Bronze Black White | EPA Rating 80 mph: | 6.9 |
| Gauge: | 11 | EPA Rating 90 mph: | 5.7 |
| Width: | 4 in square | EPA Rating 100 mph: | 4.1 |
| Weight: | 190 lbs | EPA Rating 110 mph: | 3.6 |
| Bolt Circle: | 8 in - 10 in | EPA Rating 120 mph: | 2.2 |
| Bolt Projection: | 2.75 in | Warranty: | 1 Year |

30 Foot Steel Square Pole | 5 Inches Wide | Anchor Base

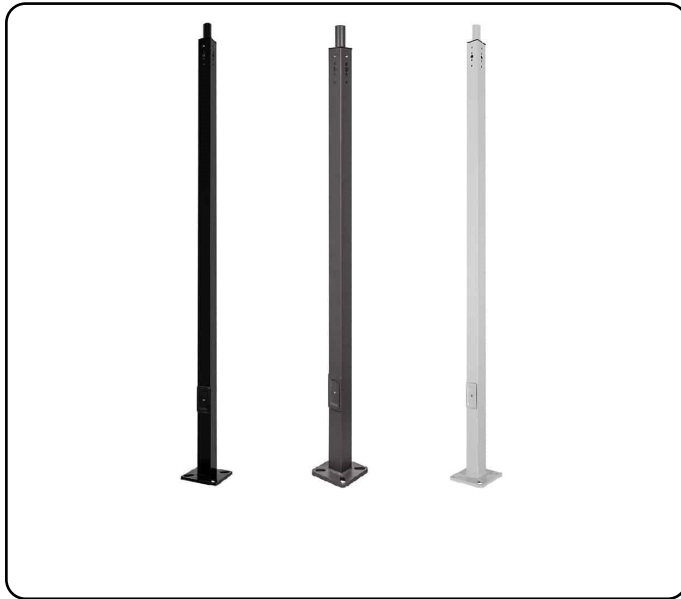

Product Details

SKU: MLLG-WL-POLE-30FT-5-SQ-[COLOR]-TN

Web ID: 1911

Key Features Height: 30 ft Gauge: 11 Width: 5 in square Weight: 286 lbs Bolt Circle: 8 - 10 in Bolt Projection: 3.375 in Base Plate: 9.85 in x 9.85 in x 0.79 in EPA Rating 70 mph: 9.6 EPA Rating 80 mph: 7.4 EPA Rating 90 mph: 6.1 EPA Rating 100 mph: 5.8 EPA Rating 110 mph: 4.6 EPA Rating 120 mph: 3.8 Warranty: 1 Year 30 Foot Steel Pole 5 In Square with 2 3/8 inch tenon Architectural 11 gauge steel Bolt Circle 8-10 inches 4 sides predrilled and hole plugs included. Conforms to ASTM-A 500 Grade B: Min Yield Strength-46000 PSI. Minimum Order: 2 Install kits are sold separately. Install kit includes anchor bolts positioning plate top cover and base cover.

Product Specifications

| | | | |
|-------------------------|-----------------------------|----------------------------|--------|
| Height: | 30 ft | EPA Rating 70 mph: | 9.6 |
| Gauge: | 11 | EPA Rating 80 mph: | 7.4 |
| Width: | 5 in square | EPA Rating 90 mph: | 6.1 |
| Weight: | 286 lbs | EPA Rating 100 mph: | 5.8 |
| Bolt Circle: | 8 - 10 in | EPA Rating 110 mph: | 4.6 |
| Bolt Projection: | 3.375 in | EPA Rating 120 mph: | 3.8 |
| Base Plate: | 9.85 in x 9.85 in x 0.79 in | Warranty: | 1 Year |

30 Foot Steel Round Pole | 5 Inches Wide | Anchor Base



Product Details

SKU: MLLG-WL-POLE-30FT-5-RD-BZ-TN


Web ID: 2071

Key Features
 Height: 30 ft Gauge: 11 Width: 5 in round Weight: 180 lbs
 Bolt Circle: 8 in - 10 in Bolt Projection: 3.15 in EPA Rating 70 mph: 9.2
 EPA Rating 80 mph: 7.4 EPA Rating 90 mph: 6.1 EPA Rating 100 mph:
 5.8 EPA Rating 110 mph: 4.8 EPA Rating 120 mph: 3.2 Warranty: 1 Year
 Our 30 foot square steel light poles are 4 inches square and come with
 a removable pole cap. The 30 ft steel light pole is hot-dip galvanized
 and powder coated architectural bronze in color. Our 30 ft light pole
 uses 11 gauge steel. Square steel poles are commonly used for parking
 lots. Comes with a 2 3/8 Tenon. Bolt Circle range 8-10 Inches bolt size
 3/4x17x3 Inches 4 sides of the pole shaft are predrilled and hole plugs
 included. Conforms to wall thickness requirements of ASTM-A 500
 Grade B: Min Yield Strength-46000 PSI. Minimum Order: 2
 Accessories Available: MLLG-WL-POLE-RD-5-NEW-KIT - Base Kit: anchor bolts
 positioning plate and 5 inch round base cover MLLG-WD-POLE-BH-2-BZ
 - 2 Fixture 180 Degree Bullhorn mount - Bronze. Mounts on a 2 3/8
 inch Tenon. MLLG-WD-POLE-BH-3-BZ - 3 Fixture 180 Degree Bullhorn
 mount - Bronze. Mounts on a 2 3/8 inch
 Tenon. MLLG-WD-POLE-BH-4-BZ - 4 Fixture 180 Degree Bullhorn mount
 - Bronze. Mounts on a 2 3/8 inch Tenon.

Product Specifications

| | | | |
|---------------------------|--------------|----------------------------|--------|
| Height: | 30 ft | EPA Rating 80 mph: | 7.4 |
| Gauge: | 11 | EPA Rating 90 mph: | 6.1 |
| Width: | 5 in round | EPA Rating 100 mph: | 5.8 |
| Weight: | 180 lbs | EPA Rating 110 mph: | 4.8 |
| Bolt Circle: | 8 in - 10 in | EPA Rating 120 mph: | 3.2 |
| Bolt Projection: | 3.15 in | Warranty: | 1 Year |
| EPA Rating 70 mph: | 9.2 | | |

30 Foot Round Tapered Steel Light Pole | 7 Inch Base Diameter | Anchor Base

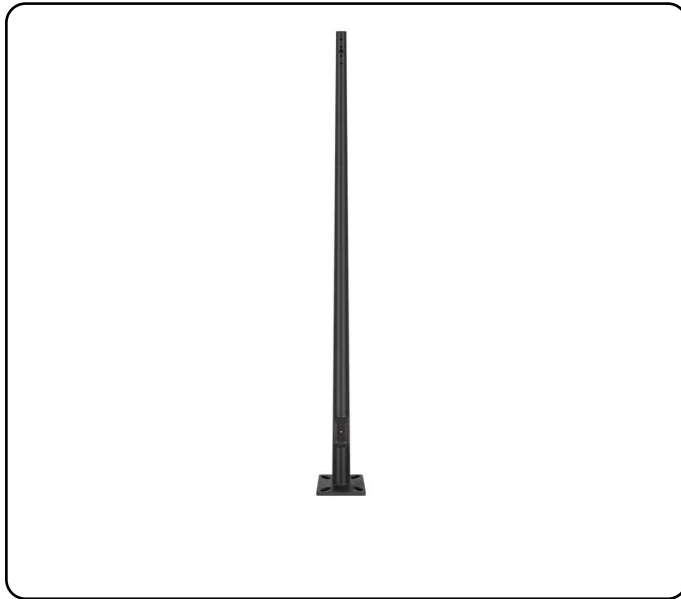

Product Details

SKU: MLLG-WL-POLE-30FT-7-TRD-BZ-TN

Web ID: 2171

Key Features Height: 30 ft Gauge: 7 Width: 7 In at Base / 3 In at Top Weight: 300 lbs Bolt Circle: 9.8 in - 11.4 in Bolt Projection: 3.15 Color: Architectural Bronze EPA Rating 70 mph: 10.5 EPA Rating 80 mph: 8.8 EPA Rating 90 mph: 7.9 EPA Rating 100 mph: 6.5 EPA Rating 110 mph: 5.4 EPA Rating 120 mph: 4.4 EPA Rating 140 mph: 2.4 EPA Rating 150 mph: 1.2 Warranty: 1 Year 30 Foot Round Tapered Steel Pole 7 Inch Diameter at Base 3 Inch at top. Hot Dip Galvanized with Bronze Powder coating finish 7 gauge 2 sides predrilled (180 Degrees) and hole plugs included. Confirms to ASTM-A 500 Grade B: Min Yield Strength 46000 PSI. Accessories MLLG-WL-POLE-TRD-7-KIT: Installation Kit for 7-inch tapered round pole. Consists of Anchor Bolts a Positioning Plate and a Base Cover NO RETURNS OR EXCHANGES ON LIGHT POLES. Please be advised that our steel poles are covered solely by a 1-year workmanship warranty which ensures that the poles are free from defects from the manufacturing process such as welds and structural integrity for a period of one year from the date of purchase. This warranty does not cover damage resulting from external factors misuse or normal wear and tear.

Product Specifications

| | | | |
|---------------------------|----------------------------|----------------------------|--------|
| Height: | 30 ft | EPA Rating 80 mph: | 8.8 |
| Gauge: | 7 | EPA Rating 90 mph: | 7.9 |
| Width: | 7 In at Base / 3 In at Top | EPA Rating 100 mph: | 6.5 |
| Weight: | 300 lbs | EPA Rating 110 mph: | 5.4 |
| Bolt Circle: | 9.8 in - 11.4 in | EPA Rating 120 mph: | 4.4 |
| Bolt Projection: | 3.15 | EPA Rating 140 mph: | 2.4 |
| Color: | Architectural Bronze | EPA Rating 150 mph: | 1.2 |
| EPA Rating 70 mph: | 10.5 | Warranty: | 1 Year |